


REZONEX

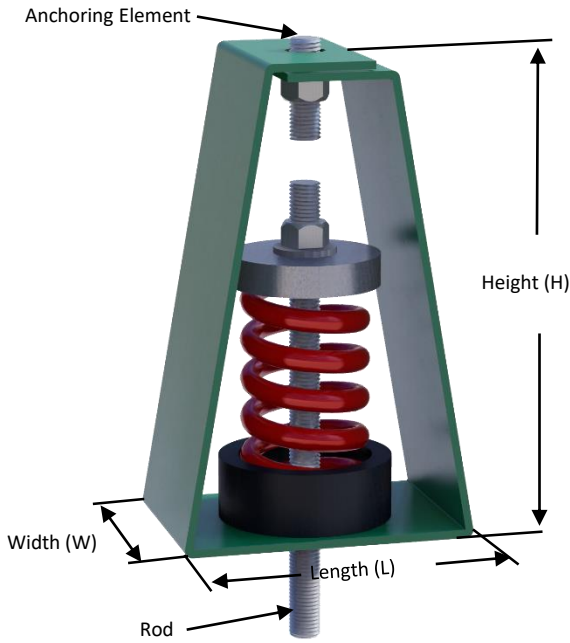

REZONEX YA Spring Hanger

- These are spring hangers used to prevent the transmission of vibration in devices, ducts and pipes to the building through suspension elements.
- It is used to prevent the transmission of noise-induced vibration on the suspended ceiling to the building structure.

YA Dimensions

| Length (L) (mm) | Width (W) (mm) | Height (H) (mm) | Anchoring Element (max.) | Rod (max.) |
|--------------------|-------------------|--------------------|-----------------------------|---------------|
| 74 | 50 | 120 | M10 | M10 |

YA Spring Capacities

| Model | Rated Capacity (kg) | Rated Deflection (mm) | Limit Capacity (kg) | Limit Deflection (mm) | Closing Deflection (mm) | Spring Constant (kg/mm) | Spring Colour |
|-------|---------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------------|-------------------------------|---------------|
| D-8 | 8 | 25 | 11 | 34 | 42,5 | 0,32 | White |
| D-13 | 13 | 25 | 17 | 33 | 40,4 | 0,52 | Green |
| D-17 | 17 | 25 | 22 | 31 | 39 | 0,7 | Blue |
| D-23 | 23 | 25 | 28 | 30 | 37,6 | 0,92 | Yellow |
| D-34 | 34 | 25 | 39 | 29 | 35,5 | 1,35 | Orange |
| D-60 | 60 | 25 | 74 | 31 | 37 | 2,42 | Red |
| A-100 | 100 | 25 | 111 | 27 | 33,5 | 4,08 | Black |

INSTALLATION INSTRUCTIONS

1. The insulator is attached to the ceiling with anchor or rod through anchor hole on the cabinet.
2. The rod that will carry the system or the device is passed through the spring cover and the spring is collapsed by compressing with a nut.

Usage areas: Suspended equipment
Pipe and duct lines
Suspended ceilings



DKM Proje ve İnşaat San. Tic. A.Ş.
Cevizli Mh. Bağdat Cd. No:538 Da:5 Maltepe
34846 İstanbul/Türkiye
info@dkminsaat.com www.dkminsaat.com

